


MP2S-CAN: LED & switch description

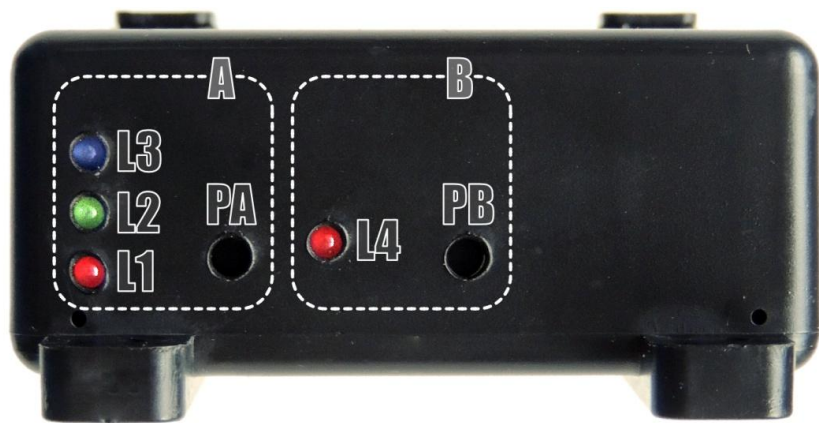

Group „A”: information - configuration

L1: red LED

- information about operating and status of car CAN-Bus;
- presentation function under using time of microswitch PA;

L2: green LED

- information about status of reading data from car CAN-Bus;

L3: blue LED

- information about status of charging trailer battery circuit;

PA: group A switch

- presentation current settings of module;
- setting the program number (change of supported cars group);
- module reset to factory settings (doesn't support any car !);

Group „B”: operation mode with car CAN-Bus

L4: red LED

- information about current mode of CAN-Bus (when car is on);

PB: group B switch

- presentation the current operation mode when CAN-Bus is inactive;
- cyclical change of operating mode (passive > active > event >);

QUASAR Electronics

✉ Cieslewskich 25k Street
03-017 Warsaw, Poland
☎ +48 22 4273141...44
@ office@quasarelectronics.pl
🌐 www.quasarelectronics.pl/en

