



Tow bar wiring kit with electronic module

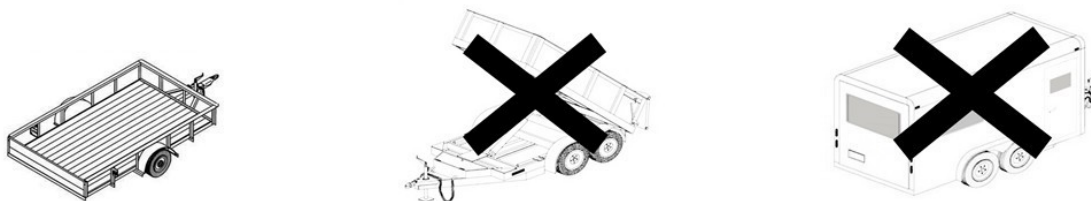

Application:

- Vehicles with 12 V electrical installation;
- Cargo trailers equipped with electrical installation with 7-pin plug (ISO 1724).



Short description:

The module does not overload the lamps driving system of the car as the current consumption from signal inputs is approximately 1 mA, which excludes the malfunction of the car electronics systems.

The module is designed to interoperate with both traditional fiber bulbs and LED lamps for cars and trailers. The module uses a digital analysis of multiplexed control for all lights.

The sequential control of fog light enables turning on the trailer fog light while the car fog light is turned off.

The module has optional multicolor LED signaling the connection of trailer, turn indicators bulb damage (also acoustic warning) and turning on the trailer fog light.

Additionally, the module can control the car park distance control system.

Assembly kit content:

- Control unit;
- Wiring harness;
- 7-pin trailer socket with seal and screws;
- 10 A fuse with holder;
- Assembly accessories.



Additional accessories:













PDC-OFF — modules deactivating the factory parking sensors



RJ11-LED-5 — Three-color LED indicating the current status of the module functions and trailer lighting



Main features:

-  **7** Interoperation with 7-pin trailer plug
-  Digital PWM signal analysis
-  Designed for mounting in vehicles with incandescent bulb or LED lamps and with a standard or multiplexed installation
-  Interoperation with trailer incandescent bulbs or LED lamps
-  Sequential switching on the trailer fog light
-  Sound signaling of the electric connection and disconnection of the trailer
-  Sound signaling of burnout of the trailer direction indicator bulb
-  Sound signaling of switching on and off the trailer fog light
-  Connected trailer status output for deactivating PDC
-  Interoperation with an optional 3-color LED display

Complete checking of module correct connection is possible using the tester available in the manufacturer's offer

